

Fuji Integrated Controller **MICREX-SX** Series

Programmable Controller **SPF Plus**

SPF Plus for motion



Achieving Wide Variety of
Motion Controls with High Performance



High-Performance Compact Motion Controller that Flexibly Supports Variety of Machine Systems



Fuji Integrated Controllers **MICREX-SX** Series


SPF Plus

POINT

Covers high-computation motion control such as synchronous control and interpolation control


The furnishing of function blocks that can be utilized in various applications enables higher precise machine control.

Application example for a packaging machine

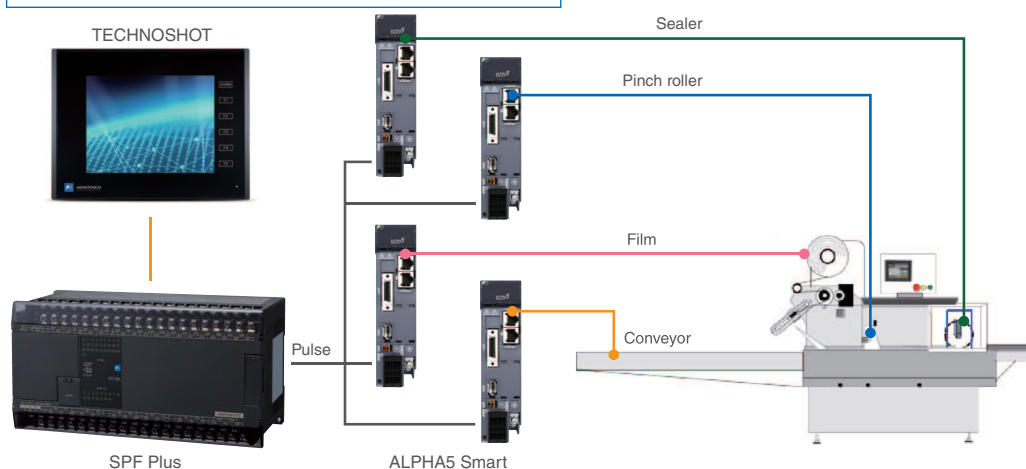

The film, conveyor, pinch roller and sealer operate synchronously with the operational pattern being automatically calculated from the length of the cut.

System Configuration

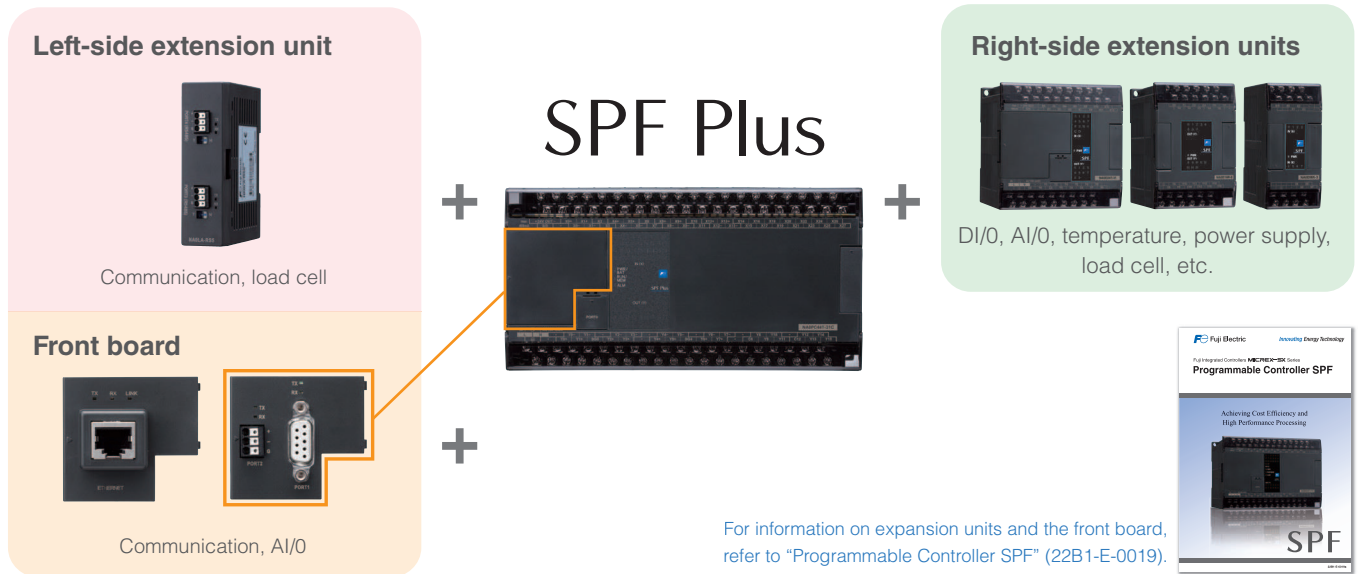

Type

Type	Power supply
NA0PC44T-34C	24V DC
NA0PC44T-31C	100-240V AC

I/O Specifications

	Rated Voltage	Input/Output type	Speed	Point
Input	5V DC	Differential input	Ultra-High-speed	500kHz*1
	24V DC	Source, sink common	Medium-speed	20kHz
			Low-speed	0.83kHz
Output	—	Differential output	Ultra-High-speed	500kHz*1
	12 to 24V DC	Sink output	Low-speed	—

*1 In A/B mode, maximum frequency becomes half.

Motion function block

FB name	Function
VM00_VM	Virtual main axis
VM01_PTP	PTP positioning
VM02_INTP	2-axis linear interpolation 2-axis arc interpolation (radius) 2-axis arc interpolation (center point)
VM03_PSYNC	Ratio synchronization
VM04_RSYNC	Interval synchronization (rotation operation)
VM05_FSYNC	Interval synchronization (reciprocating operation)
VM06_CAM	Electronic cam operation
VM07_CAMPTN	Creation of cam pattern
VMP101_MARK	Mark detection
VMP102_PHADJ	Phase adjustment

Examples of controls using motion function blocks

Interpolation control

Linear interpolation and circular arc interpolation are available. This consists of the mechanisms of 2 axes, with movement being made according to the movement method (linear, circular arc) determined for each mechanism, and operation taking place until the target position is finally obtained.

2-axis linear interpolation

Movement is made in a linear line shape synchronizing the 2 orthogonal axes.

2-axis circular arc interpolation

Movement is made in a circular arc shape synchronizing the 2 orthogonal axes.

Synchronous control

The other mechanisms (slaves) follow and move in accordance with the movement of the reference (master) mechanisms.

Synchronous operation

Master shafts


Slave shafts

The slave shafts operate in conjunction with the movement of the master shafts.

Programming Environment

The programming support tool Expert is to further improve programming development efficiency.
This is a Windows-compatible programming support tool conforming to the IEC61131-3 International Standard.

SX Programmer Expert

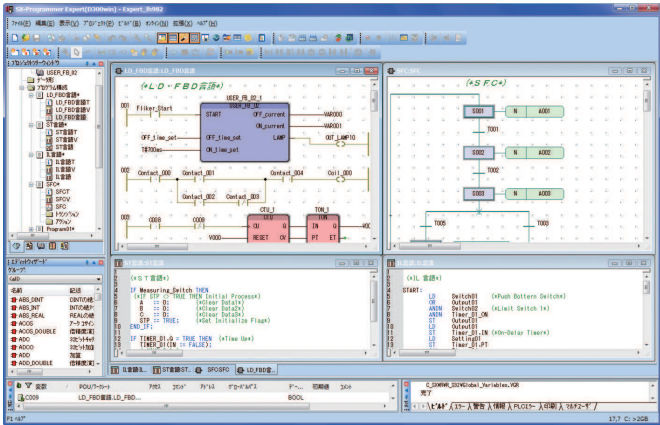

Improvement in software development efficiency

Programming in units of POU or worksheets allows structured design method by dividing it by function and process. This method enables multiple designers to divide the program design among them so that a substantial reduction in the program creation time can be achieved.

Programming using the same techniques as those of microcomputers and personal computers

The ST language is similar to the C language with which programs can be created using the same techniques as those of microcomputers and personal computers for complex calculations that are hard to implement using the Ladder language. Programs and circuits that are frequently used can easily be reused by making them into FB (function blocks).

Writing in multiple languages

- This tool completely supports 5 types of program representations specified by the standards.
- It allows the programmer to combine multiple program representations appropriate for the control target.

Supported representations

- IL (Instruction List)
- LD (Ladder Diagram)
- FBD (Function Block Diagram)
- ST (Structured Text)
- SFC (Sequential Function Chart)

Excellent documentation function

- The documentation preparation function has been substantially improved. Not only can it print drawing numbers, dates, pages, and drawing borders, but also company logos and comments.

POD cooperation function

- This tool has implemented function module support and POD cooperation support functions as common support tools.

Note) The SPF Plus is not compatible with the programming support tool - "SX Programmer Standard".

Outline drawing



General specifications

Item	Specifications
Physical environment	Operating ambient temperature
	0 to +55 °C
	Storage (transportation) temperature
	-25 to +70 °C
	Relative humidity
	20 to 95% RH (there should be no condensation) (5 to 95% RH during transport, there should be no condensation)
Mechanical operating conditions	Pollution degree
	Pollution degree 2 ^{Note 1)}
	Corrosion resistance
Electrical operating conditions	Usage altitude
	Altitude of 2,000 m or less (air pressure 70kPa or higher during transport)
	Vibration resistance
	Half amplitude: 0.15 mm, constant acceleration: 19.6 m/s ² 2 hours in each direction, total of 6 hours ^{Note 2) Note 3)}
	Shock resistance
	Peak acceleration: 98 m/s ² three times in each direction
Construction	Electrostatic discharge
	±4 kV: contact discharge method ±8 kV: aerial discharge method
	Radioactive radiofrequency electromagnetic field
	80 to 1,000MHz 10 V/m 1.4 to 2.0GHz 3 V/m, 2.0 to 2.7GHz 1 V/m
	EFT burst waves
	Power lines, input/output signal lines (AC unshielded wire): ±2 kV Communication lines, input/output signal lines (excl. AC unshielded wire): ±1 kV
Cooling system	Lightning surge
	AC power supply: common mode ±2 kV, normal mode ±1 kV DC power supply: common mode ±0.5 kV, normal mode ±0.5 kV
	Radiofrequency electromagnetic field conduction interference
	150kHz to 80MHz, 10 V
	Power frequency magnetic field
	50Hz, 30A/m
Construction	Open equipment built into panel
Cooling system	Natural cooling

Note 1) Pollution degree 2 Normally, this is the state in which non-conductive pollution occurs. However, there are circumstances stipulated in which condensation may produce a state of temporary conductivity.

Note 2) This is a mounted state in which the unit is fixed to the control panel with fixing screws. Make sure that there are no vibrations or shocks during DIN rail mounting.

Note 3) Be sure to implement vibration countermeasures for environments in which there is repeated or continuous vibrations.

Power supply specifications

Item	NA0PC44T-31C (AC power supply type)	NA0PC44T-34C (DC power supply type)
Rated voltage	100 to 240 V AC	24 V DC
Permissible voltage range	85 to 264 V AC	20.4 to 28.8 V DC
Rated frequency	50/60Hz	-
Permissible frequency range	47 to 63Hz	-
Permissible momentary power failure time	20 ms or less	10 ms or less
Rated output voltage (service power supply 24 V DC output)	24 V DC ±10%	
Inrush current	20A at 264 V AC	20A at 24 V DC
Dielectric strength	1500 V DC, 1 minute	500 V DC, 1 minute
Insulation method	Insulation with transformer, photocoupler	
Insulation resistance	10MΩ or more with 500 V DC megger	

Specifications

Performance specifications

Item		Specifications: Base unit
Execution control method		Stored program, cyclic scan method (default task), periodic tasks, event tasks
Input/output connection method		Direct connection input/output method: Local bus
Direct connection input/output control method	Overall	Scan batch refresh method
	Digital input/output	Task synchronization refresh method
MPU		16-bit OS/execution processor (dual use)
Memory type		Program memory, data memory, temporary memory
Programming language <IEC61131-3 compliant>		IL language (Instruction List)
		ST language (Structured Text)
		LD language (Ladder Diagram)
		FBD language (Function Block Diagram)
		SFC element (Sequential Function Chart)
Instruction word length		Variable length (differs with instruction) 1 step = 32 bits
Instruction execution time		LD instruction 0.30 μs
Program memory capacity		20 Ksteps (1 step = 32 bits)
Input/output memory	Fixed	512 words
System memory	Fixed	512 words
Data memory capacity		40 Kwords
Data memory capacity	High-speed standard memory	Fixed 4 Kwords
	Standard memory	Variable 4 Kwords
	Retain memory	Variable 4 Kwords
	User FB instance memory	Variable 8 Kwords
	User FB instance memory Initial value setting area	Variable 9 Kwords
	System FB instance memory	Variable 11 Kwords
	Timer	Variable 512 points (4 Kwords)
	Accumulating timer	Variable 0 points (0 Kwords)
	Counter	Variable 512 points (2 Kwords)
	Edge detection	Variable 2048 points (4 Kwords)
	Other	Variable 1 Kwords
ZIP file area		64 Kbyte
Data type		BOOL / INT / DINT / UNIT / UDINT / REAL / TIME / DT / DATE / TOD / WORD / DWORD
Number of tasks	Default task	1
	Fixed-cycle task	15
	Event task	(total number of fixed cycles, events)
POU	Program	64 / default task 8 / interrupt task
	User FB	128
	User FCT	128
	Number of nested user FB/FCT calls	Total: 64 (User FB/FTC calls from program also included in nesting count.)
Diagnostic function		Program check, watchdog timer, etc.
Confidentiality function		Password
Calendar function		Yes
Backup	Program memory	Flash memory
	System definition	Flash memory
	ZIP file	Flash memory
	Data memory	Built-in battery: SRAM
	Calendar	Built-in battery: RTC
Built-in battery	Backup period	10 years or longer (at product ambient temperature of 55 °C), replacement not possible
Memory pack	External: Installation and removal possible	Backed up content: Programs : System definition : ZIP file : Data

Motion System that Achieves its Best Performance in Combination with the SPF Plus

Programmable Display MONITOUCH



V9 Series

HMI Achieving Industry's Top Class Performance

- User-friendly operation supporting gestures
- Power of expression supported by 16.77 million color display and TrueType font
- Network functions supporting wireless LAN, VNC server, and VPN
- Comes equipped with USB (Ver. 2.0) port, Ethernet port, and SD card slot



Catalog No.: 9031NE4

TECHNOSHOT TS1000 Series



The programmable displays in the TECHNOSHOT series are easy-to-see, and have bright TFT color liquid crystal screens. A high-resolution display and high-speed response display give TECHNOSHOT panels a high power of expression.



Catalog No.: 9027E1

Servo System



ALPHA⁵ Smart

Fuji Servo System with Enhanced Ease-of-Use

◆ High Performance

High-speed, high precision positioning


- Frequency response 1500Hz
- Max motor speed 6000r/min
- High resolution encoder
 - 18bit ABS/INC 262.144 pulse
 - 20bit INC 1,048,576 pulse

◆ High Value

Higher cost performance with original main feature

◆ High Usability

New servo operator offers improved usability



Catalog No.: 24C1-E-0131

Pro+

CORPORATION



บริษัท โปรพลัส คอร์ปอเรชั่น จำกัด

22/354 หมู่ 4 ตำบลบึง อำเภอสรีราชา จังหวัดชลบุรี 20230


Mobile : 099-6103519 | 099-7358459
Tel : 033-130209
Email : Sales@propluscorp.co.th
Web : www.Propluscorp.co.th




@propluscorp

ยินดีให้คำปรึกษา หรือสอบถามสินค้าบริการได้ตลอดเวลา

 /propluscorp

 /abbjokabthailanddistributor

 /propluscorp

